



CONSTRUCTION
INDUSTRY COUNCIL
建造業議會

Metal Scaffolder Skilled Trade Test Mock Written Test Paper

此文件關於金屬棚架大工工藝測試考題。如有需要索取此文件的中文版本，請致電 2100 9232 與工藝測試中心聯絡。

Disclaimer

No part of this material may be reproduced or transmitted in any form or any means without the written permission of the CIC. Whilst reasonable efforts have been made to ensure the accuracy of the information contained in this material, the CIC nevertheless would encourage readers to seek appropriate independent advice from their professional advisers where possible and readers should not treat or rely on this material as a substitute for such professional advice for taking any relevant actions.

Enquiries

Enquiries on this Material may be made to the Trade Test Centre at:

95, Yue Kwong Road
Aberdeen
Hong Kong

Tel: (852) 2100 9232
Fax: (852) 2100 9249
Email: enquiry@cic.hk
Website: www.cic.hk

© 2015 Construction Industry Council.

1. Which of the following specification is for metal scaffolding ?
 - (a) HKJC
 - (b) HKQA
 - (c) BS 1139
 - (d) ISO 9001

2. Which one of the following members is a tube to form the support for boards or units forming the working platform ?
 - (a) standard
 - (b) ledger
 - (c) transom
 - (d) brace

3. The spacing of lines of ties should not exceed :
 - (a) 4.5 m
 - (b) 6.5 m
 - (c) 8.5 m
 - (d) 10.5 m

4. The joints in continuous diagonal bracing should be made by two tubes with overlapping :
 - (a) 300 mm
 - (b) 800 mm
 - (c) 1000 mm
 - (d) 2000 mm

5. A transom should be fixed to :
 - (a) standards
 - (b) ledgers
 - (c) standards and ledgers
 - (d) standards or ledgers


6. Which one of the following members of a scaffold is to take up dead load ?

- (a) putlog
- (b) transom
- (c) standard
- (d) ledger

7. The ledgers should be level to :


- (a) within +/- 10 mm in 2 m
- (b) within +/- 15 mm in 2 m
- (c) within +/- 20 mm in 2 m
- (d) within +/- 25 mm in 2 m

8. As the drawing shown below, X should be :

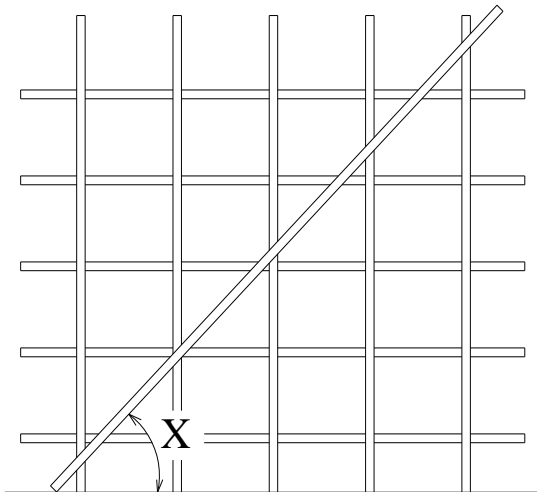


- (a) between 35° - 45°
- (b) between 35° - 55°
- (c) between 45° - 55°
- (d) between 45° - 65°

9. As the drawing shown below, W should not be greater than :

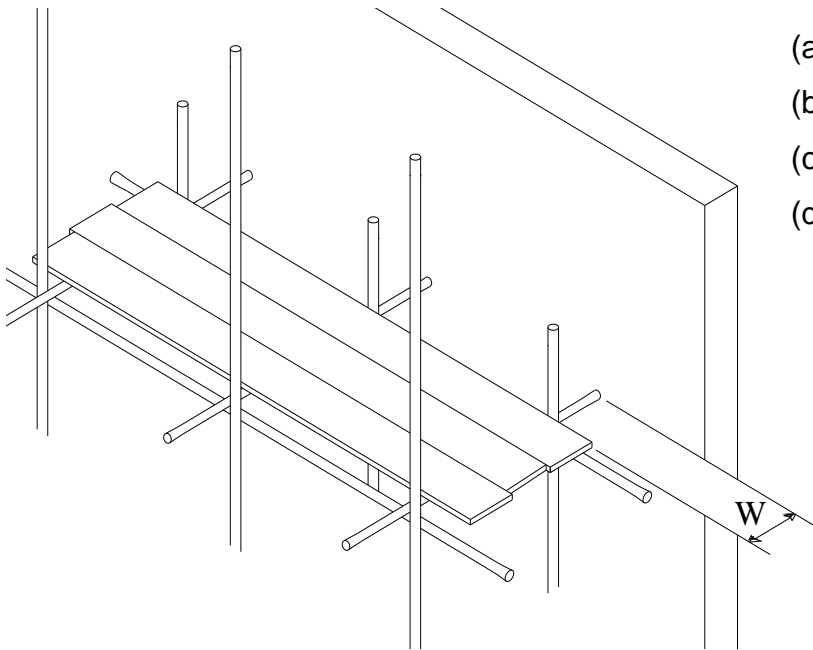


- (a) 100 mm
- (b) 200 mm
- (c) 300 mm
- (d) 400 mm

10. The member as arrowed is called :

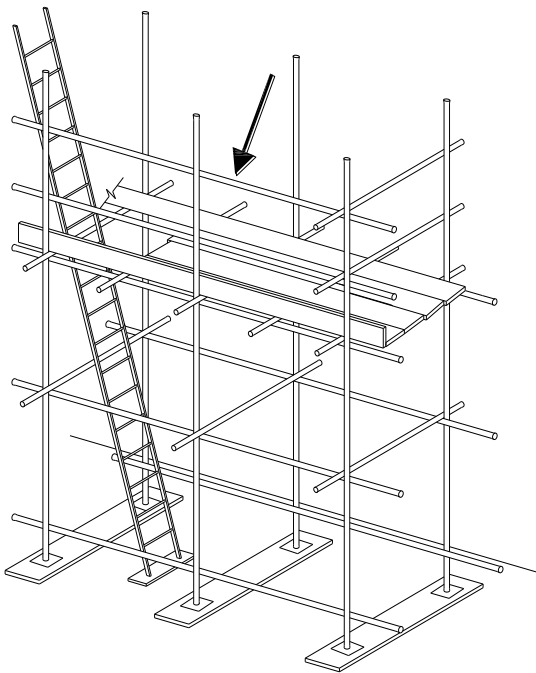

- (a) standard
- (b) ledger
- (c) transom
- (d) brace

11. As a metal tower is adjacent to building, H should not be more than :

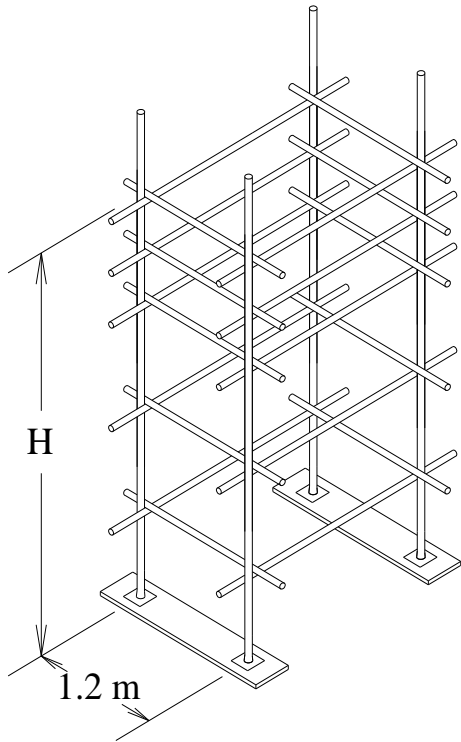


- (a) 3.0 m
- (b) 3.6 m
- (c) 4.2 m
- (d) 4.8 m

12. Which one of the following couplers should be used in fixing facade brace to transom ?


- (a) A coupler with a central vertical hole and a horizontal hole, designed for a vertical post and a horizontal brace.
- (b) A coupler with two vertical holes and a horizontal hole, designed for two vertical posts and a horizontal brace.
- (c) A coupler with two horizontal holes and a vertical hole, designed for two horizontal transoms and a vertical post.
- (d) A coupler with two horizontal holes and a vertical hole, designed for two horizontal transoms and a vertical post, with a different internal structure than (c).

13. According to the details shown below, the dimension of C should be :

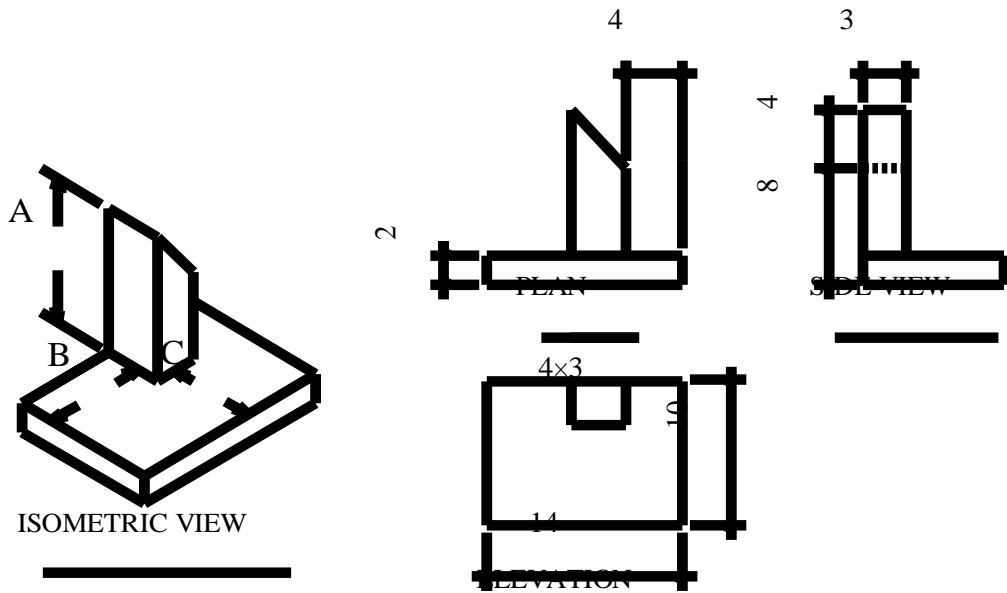

- (a) 5
- (b) 6
- (c) 7
- (d) 8


14. The sole plate of timber shown should not be less than :

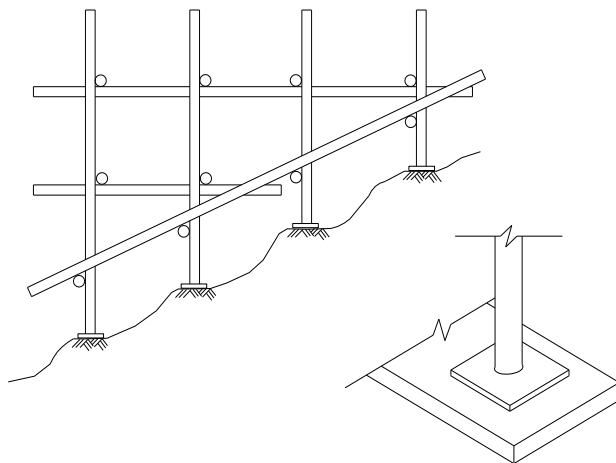


- (a) 15 mm in thickness
- (b) 25 mm in thickness
- (c) 35 mm in thickness
- (d) 45 mm in thickness

15. Which two of the following couplers should be used for the joint of standards ?


- (a) A and B
- (b) B and C
- (c) C and D
- (d) A and D




A



C




B




D


16. Refer to the drawings shows below, which one of the postures is correct in manual handling of tubes ?

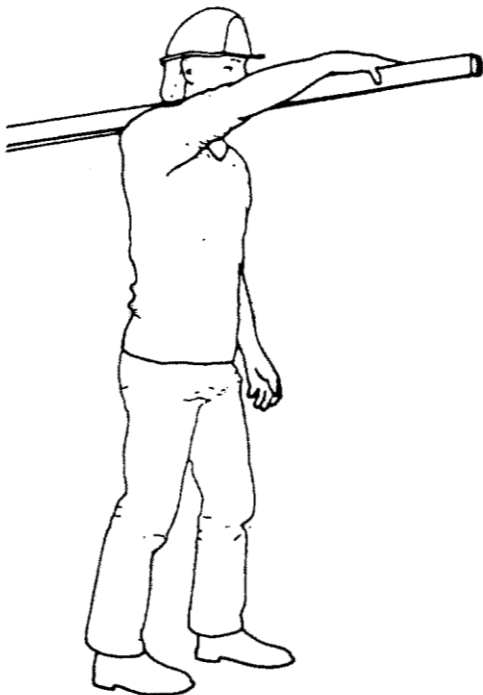


(a)

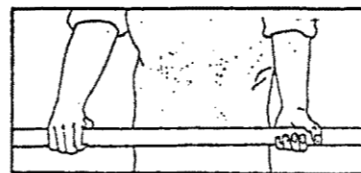


(b)

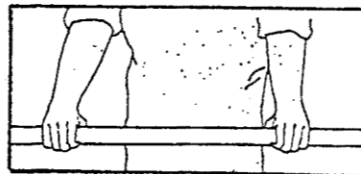

(c)

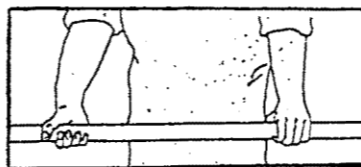

(d)

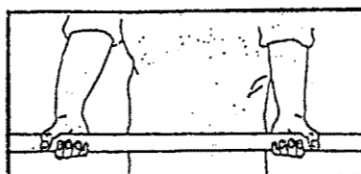

17. According to the " Code of Practice for Metal Scaffolding Safety", a scaffold shall not be used unless it has been inspected by a :
- (a) safety officer
 - (b) structure engineer
 - (c) competent person
 - (d) consultant
18. A scaffold shall be periodically inspected. Define "periodically" :
- (a) At regular intervals not exceeding 7 days
 - (b) At regular intervals not exceeding 14 days
 - (c) At regular intervals not exceeding 21 days
 - (d) At regular intervals not exceeding 30 days
19. The height of guardrails should not be less than :
- (a) 800 mm
 - (b) 900 mm
 - (c) 1000 mm
 - (d) 1100 mm
20. The "Code of Practice for Metal Scaffolding Safety" is issued by :
- (a) Buildings Department
 - (b) Labour Department
 - (c) Housing Department
 - (d) Fire Services Department