




# EQUIP EXCAVATORS WITH ADDITIONAL SAFETY DEVICES

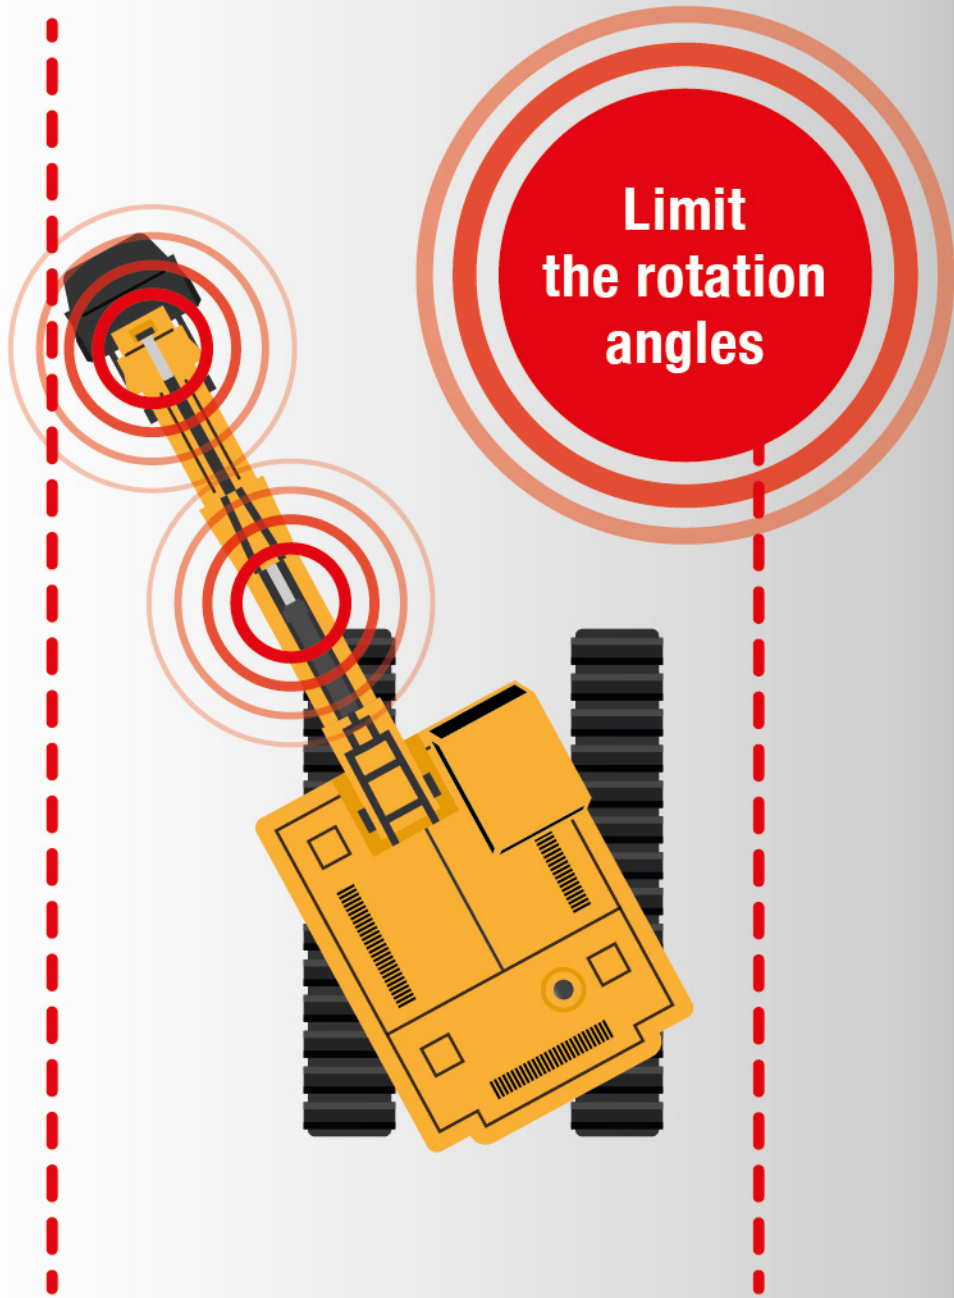

**A dynamic risk assessment** should also be carried out before operating an excavator, including:

- ✓ Properly fence off the operating area of the excavator and display appropriate warning signs.
- ✓ The lookout man should be outside the operating area to check and ensure that no pedestrians are entering or staying in the operating area at any time.
- ✓ Check safety equipment such as rearview mirrors, CCTVs, sensors and alert systems on excavators to ensure that they are in good operating condition.
- ✓ Conduct field control briefing to ensure that the relevant workers are aware of the risks of the site environment and the associated safety measures.

## Disclaimer

Whilst reasonable efforts have been made to ensure the accuracy of the information contained in this publication, the Construction Industry Council would encourage readers to seek appropriate independent advice from their professional advisers where possible and readers should not treat or rely on this publication as a substitute for such professional advice for taking any relevant actions.

## Reference Information

Construction Innovation and  
Technology Fund (CITF) Webpage -  
Safety-related Technological Products

