



CONSTRUCTION
INDUSTRY COUNCIL
建造業議會

Plant and Equipment Operator (Percussive Pile) Skilled Trade Test Mock Written Test Paper

此文件關於打機械設備操作大工(撞擊式樁)工藝測試考題。如有需要索取此文件的中文版本，請致電 2100 9000 與香港建造業工藝測試中心聯絡。

Disclaimer

No part of this material may be reproduced or transmitted in any form or any means without the written permission of the CIC. Whilst reasonable efforts have been made to ensure the accuracy of the information contained in this material, the CIC nevertheless would encourage readers to seek appropriate independent advice from their professional advisers where possible and readers should not treat or rely on this material as a substitute for such professional advice for taking any relevant actions.

Enquiries

Enquiries on this Material may be made to the Hong Kong Construction Industry Trade Testing Centre at:

95, Yue Kwong Road
Aberdeen
Hong Kong

Tel: (852) 2100 9000
Fax: (852) 2100 9090
Email: enquiry@cic.hk
Website: www.cic.hk

© 2018 Construction Industry Council.

Plant and Equipment Operator (Percussive Pile) Trade Test
Knowledge Test

Candidate's Name (Chinese): _____

Candidate No. : _____

HK ID No. : _____

Test Date : _____Y_____M_____D

Time Limit : 60 minutes

Notes to Candidates:

Please tick in the box next to the most suitable answer of the question ().

A Tools and Equipment

1. Which of the following is not the power to drive the vibration hammer (震動樁錘)?

- (a) Hydraulic driven
- (b) Diesel driven
- (c) Electricity driven
- (d) Reaction driven

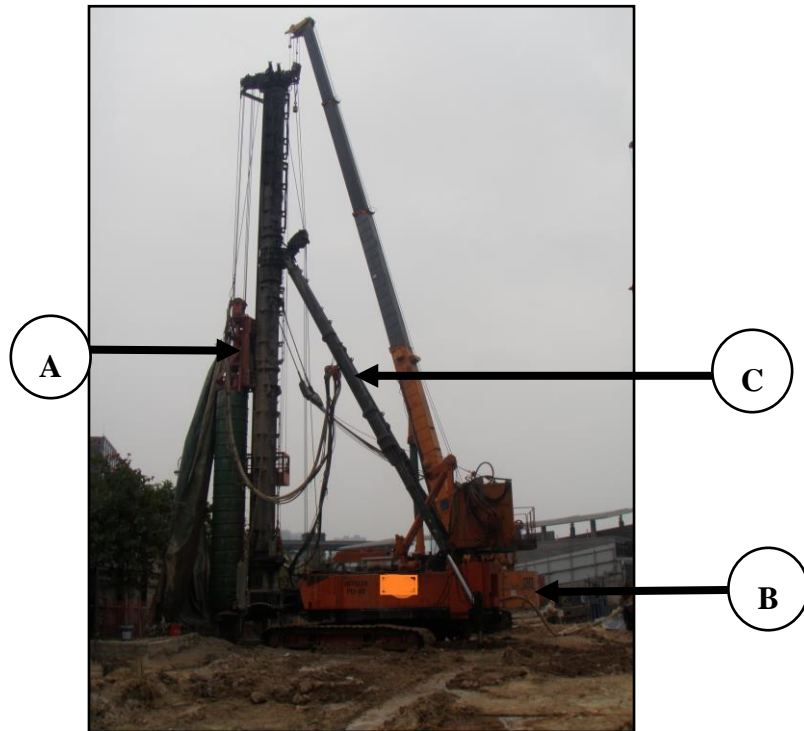


Figure (1)

2. Please select the correct name of Part “A” of the piling machine in Figure (1).

- (a) Percussive hammer (落擊樁錘)
- (b) Rear rudder (尾鉞)
- (c) Leader (導架)
- (d) Adjustable bracing (調整扶撐)

3. Please select the correct name of Part “B” of the piling machine in Figure (1).
- (a) Percussive hammer (落擊樁錘)
 - (b) Rear rudder (尾舵)
 - (c) Leader (導架)
 - (d) Adjustable bracing (調整扶撐)
4. Please select the correct name of Part “C” of the piling machine in Figure (1).
- (a) Percussive hammer (落擊樁錘)
 - (b) Rear rudder (尾舵)
 - (c) Leader (導架)
 - (d) Adjustable bracing (調整扶撐)
5. When piling starts, what type of hammer should be used for positioning?
- (a) Heavy hammer (重錘)
 - (b) Light hammer (輕錘)
 - (c) Vibration hammer (震錘)
 - (d) No specific category
6. When piling will soon complete, what type of hammer is used for the final set?
- (a) Heavy hammer (重錘)
 - (b) Light hammer (輕錘)
 - (c) Vibration hammer (震錘)
 - (d) No specific category

B Trade Knowledge

7. What must be noted when lifting heavy load?

- (i) The set up position of the crane
- (ii) The distance between the lifting point and the crane
- (iii) Inclination of the boom
- (iv) Mindful of the overload alarm

- (a) (i) and (ii)
- (b) (iii)
- (c) All of the above
- (d) None of the above

8. If it is necessary to lift a 4 m³ concrete brick, what is the estimated weight?

- (a) 2 ~ 4 tons
- (b) 5 ~ 7 tons
- (c) 8 ~ 10 tons
- (d) 11 ~ 14 tons

9. How do you release wire at height?

- (a) Choose convenient work appliance at will
- (b) Stand inside a man cage (吊人籠) complying with safety specifications
- (c) Stand directly on the hoist to enhance efficiency
- (d) The most agile colleague should be asked to climb up and release the wire

10. The driving direction of H-pile during piling should be:
- (a) According to the designed direction of the plan
 - (b) No fixed direction but must be different from the adjacent H-pile
 - (c) No fixed direction, to be decided by the worker
 - (d) None of the above
11. The distance between each H-pile is:
- (a) At least 10 m
 - (b) At least 5 m
 - (c) No specification
 - (d) Must comply with the designed specifications of the plan
12. Which of the following phenomenon is incorrect when the H-pile is driven to the rock stratum?
- (a) The sinking speed of the H-pile slows down
 - (b) The pile hammer is jumping
 - (c) The percussion noise becomes louder
 - (d) The percussion noise becomes quieter

C Construction Specifications

13. The general joining method of H-pile is:
- (a) Electric arc welding
 - (b) Interlocking by screw and bolt (絲栓互扣)
 - (c) The H-piles have sufficient overlapping
 - (d) All of the above
14. Can driving continue if the penetration speed of the pile increases or decreases suddenly during percussion piling process?
- (a) Yes, must speed up to complete
 - (b) Yes, must inform the engineer or supervisor afterwards
 - (c) No, must inform the mechanic to inspect
 - (d) No, must immediately inform the engineer or supervisor

15. When percussion piling begins, you should:
- (a) Raise the hammer as high as possible and strike the H-pile with the most vigorous force
 - (b) Slightly raise the hammer, strike the H-pile to fix the position
 - (c) Drive as fast as possible without delay in working hours
 - (d) No fixed standard
16. Is there any limitation on the number of H-pile machines on site?
- (a) No
 - (b) Depends on the quantity owned by the company
 - (c) Depends on the size of the site
 - (d) Depends on the requirements of the Environmental Protection Department
17. How do you calculate the depth of the H-pile going underground?
- (a) Memorize the numbers of H-piles being driven to measure
 - (b) Use the length marked on the H-pile
 - (c) Use a ruler to measure and calculate the depth
 - (d) Can estimate by the penetration speed of the H-pile
18. Is there any specification for the heavy hammer (重錘) in the final set?
- (a) The brand of hammer must be supplied by an authorized vendor
 - (b) The hammer must be pre-approved by the engineer
 - (c) The hammer must be brand new and used for the first time
 - (d) The hammer must be painted with a special colour

D Hand Signals in Plant Operation

19. The hand signal given by the person in the diagram during crane operation is:



- (a) Raise hoist
- (b) Use main hoist
- (c) Lower hoist slowly
- (d) Raise hoist slowly

20. The hand signal given by the person in the diagram during crane operation is:



- (a) Raise hoist
- (b) Lower hoist
- (c) Lower hoist slowly
- (d) Raise hoist slowly

21. The hand signal given by the person in the diagram during crane operation is:



- (a) Stop everything
- (b) Emergency stop
- (c) Travel
- (d) Raise boom

22. The hand signal given by the person in the diagram during crane operation is:



- (a) Stop everything
- (b) Emergency stop
- (c) Travel from me
- (d) Travel

23. The hand signal given by the person in the diagram during crane operation is:



- (a) Travel to me
- (b) Travel from me
- (c) Stop
- (d) Travel slowly

24. The hand signal given by the person in the diagram during crane operation is:



- (a) Swing the load to the right
- (b) The load is on your right
- (c) Swing to the left
- (d) Swing to the right

25. The hand signal given by the person in the diagram during crane operation is:



- (a) Well done
- (b) Raise boom
- (c) Please look to the left
- (d) Complete

26. The hand signal given by the person in the diagram during crane operation is:



- (a) Beware of object at height
- (b) Raise boom slowly
- (c) Raise load slowly
- (d) It's going to rain

27. The hand signal given by the person in the diagram during crane operation is:




- (a) Doing better and better
- (b) Raise the boom and lower the load
- (c) Lower the boom and raise the load
- (d) The higher the better

28. The hand signal given by the person in the diagram during crane operation is:



- (a) Lower hoist
- (b) Lower hoist slowly
- (c) Put the load on the ground
- (d) Beware of object on the ground

29. The hand signal given by the person in the diagram during crane operation is:

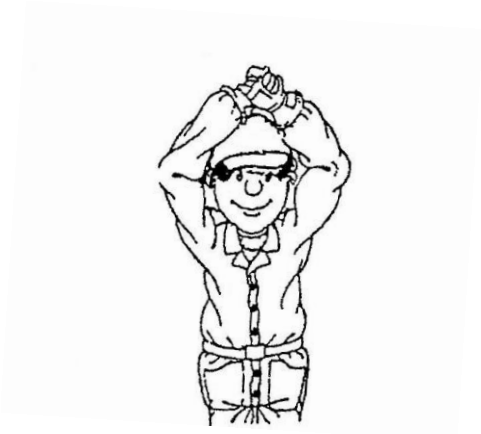

- (a) Lower hoist
- (b) Start working immediately
- (c) Time to eat
- (d) Stop everything

E Safety Knowledge

30. In general, lifting appliances should be inspected every:

- (a) 4 months
- (b) 5 months
- (c) 6 months
- (d) 7 months

31. When conducting welding process to join piles and there are other persons at the scene, which of the following measures should be taken to avoid injuring others?
- (a) Place warning notice to alert them
 - (b) Place warning notice and set up barriers surrounding the site
 - (c) Order all persons at the scene to wear protective goggles
 - (d) All personnel on site must leave and re-enter after the welding process is completed
32. What qualifications must crane operators possess before operating lifting appliances?
- (a) Having received stringent training by old masters
 - (b) Crane operators must complete recognized training in lifting appliances operation and pass the test and hold valid licence before they can operate lifting appliances
 - (c) Training provided by senior operator of the company
 - (d) All of the above
33. All lifting appliances must be inspected weekly and what form must be completed before they can be put to use?
- (a) Lifting appliances must be inspected weekly and a “Safe Operation” report be made by completing “Form 1” before they can be put to use
 - (b) Lifting appliances must be inspected weekly and a “Safe Operation” report be made by completing “Form 2” before they can be put to use
 - (c) Lifting appliances must be inspected weekly and a “Safe Operation” report be made by completing “Form 3” before they can be put to use
 - (d) Lifting appliances must be inspected weekly and a “Safe Operation” report be made by completing “Form 5” before they can be put to use

34. The validity of certificate of wires for lifting is:
- (a) 1 month
 - (b) 3 months
 - (c) 6 months
 - (d) 12 months
35. The major purpose of "Site Safety Talks" is:
- (a) To provide refreshment to entertain the workers
 - (b) A routine to fill up working hours
 - (c) To report and discuss work progress
 - (d) To regularly inculcate safety knowledge into workers
36. Which of the following method should be adopted when workers move heavy loads?
- (a) Try to move more each time to complete the work faster
 - (b) Adopt correct posture keeping the back as straight as possible
 - (c) Toss the load up the rack as much as possible to train up the body
 - (d) Take a deep breath, yell and lift the load
37. Which part of the body will easily get injured if workers adopt wrong lifting posture when moving heavy loads?
- (a) Neck
 - (b) Waist
 - (c) Calf
 - (d) Arm
38. Improvement should be made if "manual lifting" cannot be avoided, e.g. reduce stretching or the times and distance of moving. These methods can be summarized to which of the following ways of handling?
- (a) Re-design the load
 - (b) Re-design the work process
 - (c) Improve the working environment
 - (d) Drag on the working hours and increase the pay

39. Why workers should not wear cotton gloves when operating machines with rotating parts?
- (a) Cotton gloves will absorb oil
 - (b) Cotton gloves will be damaged
 - (c) Cotton gloves will be entangled in the rotating parts of the machine
 - (d) Cotton gloves will easily cause skin allergy
40. The minimum thickness of planks laid on the working platform of construction scaffold is:
- (a) 20 mm
 - (b) 25 mm
 - (c) 30 mm
 - (d) 40 mm

- End of Paper -